


## Descaling pumps and softening agents

### ST-15 descaling softening pump



### Softening agents




This product bounds the minerals causing the hardness. The coil is protected against calcination.  
Application:  
4 ml / °dH / cbm water.  
1 palett = 84 cardboard boxes (6 x 1 l)

R+M Nr.	hp cleaner	V	↔
200 015 500	< 600 l/h	230 V - 50 Hz	35
200 015 510	< 600 l/h	24 V - 50 Hz	35
200 015 505	> 600 l/h	230 V - 50 Hz	70
200 015 535	> 900 l/h	230 V - 50 Hz	140
200 015 525	> 900 l/h	24 V - 50 Hz	140

R+M Nr.	unit	⊞
950 10	box	6 x 1 l
950 40	container	10 l
950 30	container	30 l
950 20	drum	200 l

## Solenoid valves Bürkert closed in off-position

### Type 6213 without connector



### Coil type 5281-6213




0 - 10 bar / -10 - +90 °C. NBR seal (air, water)

R+M Nr.	⊙	DN	coil	↔	⊞
836 125 658	1/2"	13	24 V-50 Hz/8 W	59	99
836 125 660	1/2"	13	230 V-50 Hz/8 W	59	99
836 126 273	3/4"	13	24 V-50 Hz/8 W	59	99
836 126 275	3/4"	13	230 V-50 Hz/8 W	59	99
836 126 289	1"	20	24 V-50 Hz/8 W	80	119
836 126 291	1"	20	230 V-50 Hz/8 W	80	119

R+M Nr.	V
836 126 436	24 V/8 W
836 126 430	230 V/8 W

### Type 6013 without connector



### Coil type 6013



0 - 25 bar / -10 - +120 °C. FPM seal (hot air, oxygen, chemicals)

R+M Nr.	⊙	DN	coil	↔	⊞
836 137 538	1/4"	2	24 V-50 Hz/8 W	49	72
836 137 540	1/4"	2	230 V-50 Hz/8 W	49	72

R+M Nr.	V
836 645 556	24 V/8 W
836 645 558	230 V/8 W

### Connector



R+M Nr.
833 50

## Metering valves


### ST-161



Hose tail 9 mm : hose tail 9 mm

R+M Nr.	TYP
200 161 510	knob blue


### ST-66 with check valve

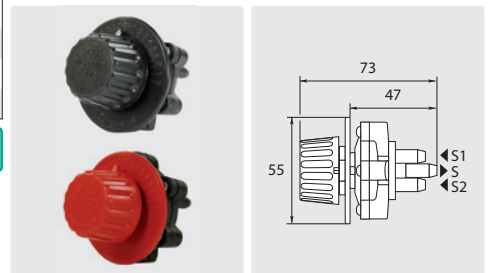

S = barb to pump. S1 = input barb 1. S2 = input barb 2

R+M Nr.	TYP
200 066 500	knob black
200 066 501	knob red


### ST-66 without check valve

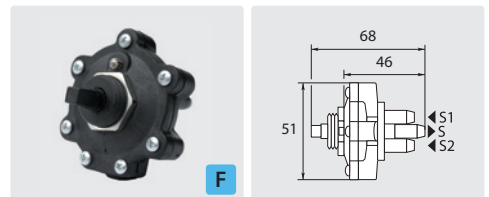

S = barb to pump. S1 = input barb 1. S2 = input barb 2

R+M Nr.	TYP
200 066 515	without knob

### Valves with spindle

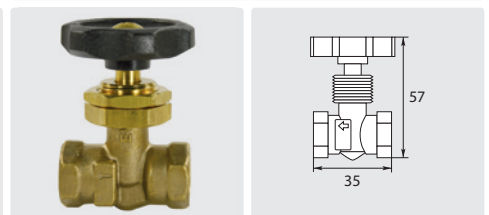

Max. 250 bar / 80 °C

R+M Nr.	⊙	⊞	TYP
535 10	1/4" F		without knob
535 15	1/4" F		with knob (panel mounting)

Further solenoid valves are on page 57 and 64. Other models are available on request.